

# The Low-Profile Multi-Flash Master Flash®

Specifically designed for **Sidewall or Low Profile Retrofit Applications**

| Advanced Ozone Resistance tested to...  |                            | EPDM<br>70 hour @ 500 pphm         | HIGH TEMP FDA SILICONE<br>70 hour @ 500 pphm |
|---|----------------------------|------------------------------------|--|
| High Temperature Resistance Tested to   | Intermittent<br>Continuous | +135°C (+275°F)<br>+100°C (+212°F) | +260°C (+500°F)<br>+225°C (+437°F)           |
| Low Temperature Resistance tested to... |                            | - 55°C (-67°F)                     | - 74°C (-101°F)                              |
| Compression Set Maximum...              |                            | 25%                                | 50%  |

\*Complete specification data and testing methods are available upon request.

## Applications:

**Drywall • Sidewall Applications • Stucco Walls  
Corrugated Metal Sides • Roof Penetrations**

## Available in:

**Three EPDM colors Black, Dark Gray, Light Gray and in  
FDA High Temp White Silicone**

## Weather Protection

**Made of EPDM or FDA High Temp White Silicone,**

These flashings are compounded specifically for maximum resistance to weathering due to ozone and ultraviolet light.



**Pipe diameters can be seen clearly for proper fitting.**

## Sleeve flexibility


Sleeve flexibility absorbs vibration and movement caused by expansion/contraction.

For retrofit applications these flashings were designed to seal existing pipes/vents that requires a wrap-around existing or hard to reach installation

**Stainless Steel Gripper for Retrofit Applications Included**


## Adaptable Base

The base is designed to mold to most panel configurations and roof pitches regardless of pipe location.

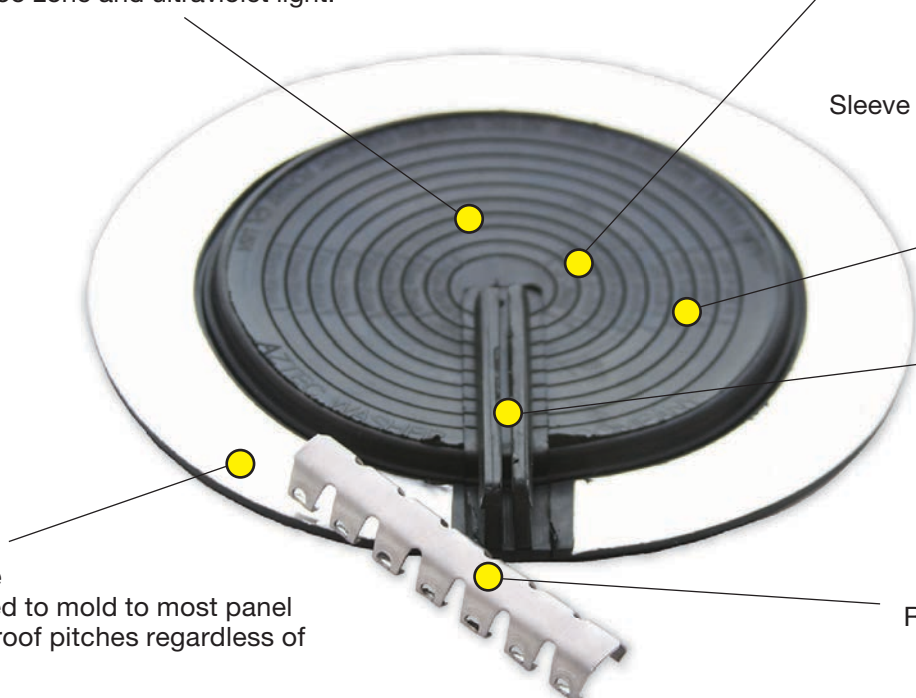

## Low-Profile Flashing Details

|    |                  |                          |
|----|------------------|--------------------------|
| #1 | A-Pipe Range     | Closed -3-3/4" (0-95mm)  |
|    | B-Overall Height | 5/16" (8mm)              |
|    | C-Base           | 6-1/4" (158mm)           |
| #2 | A-Pipe Range     | Closed- 8" (0-203mm)     |
|    | B-Overall Height | 5/16" (8mm)              |
|    | C-Base           | 10-3/4" (273mm)          |
| #3 | A-Pipe Range     | Closed-12-1/2" (0-318mm) |
|    | B-Overall Height | 5/16" (8mm)              |
|    | C-Base           | 16-1/2" (419mm)          |



UCL -5058