



# Multi-Flash Master Flash®

## For the Metal Roofing Industry

### “Two Flashings In One”

### One Design • Multiple Functions

Advanced Ozone Resistance tested to...		EPDM 70 hour @ 500 pphm	HIGH TEMP GRAY SILICONE 70 hour @ 500 pphm
High Temperature Resistance Tested to	Intermittent Continuous	+135°C (+275°F) +100°C (+212°F)	+260°C (+500°F) +225°C (+437°F)
Low Temperature Resistance tested to...		-55°C (-67°F)	-74°C (-101°F)
Compression Set Maximum...		25%	50%

\*Complete specification data and testing methods are available upon request.



### Designed for either standard or retrofit applications

### Available In: 10 sizes

For retrofit applications, these flashings were designed to seal existing pipes/vents that requires a wrap-around existing or hard to reach installation


#### Weather Protection

Made of EPDM or High Temp Gray Silicone, These flashings are compounded specifically for maximum resistance to weathering due to ozone and ultraviolet light.

Sleeve flexibility absorbs vibration and pipe movement caused by expansion/contraction

Pipe diameters can be seen clearly for proper fitting.

Unique compression seal technology

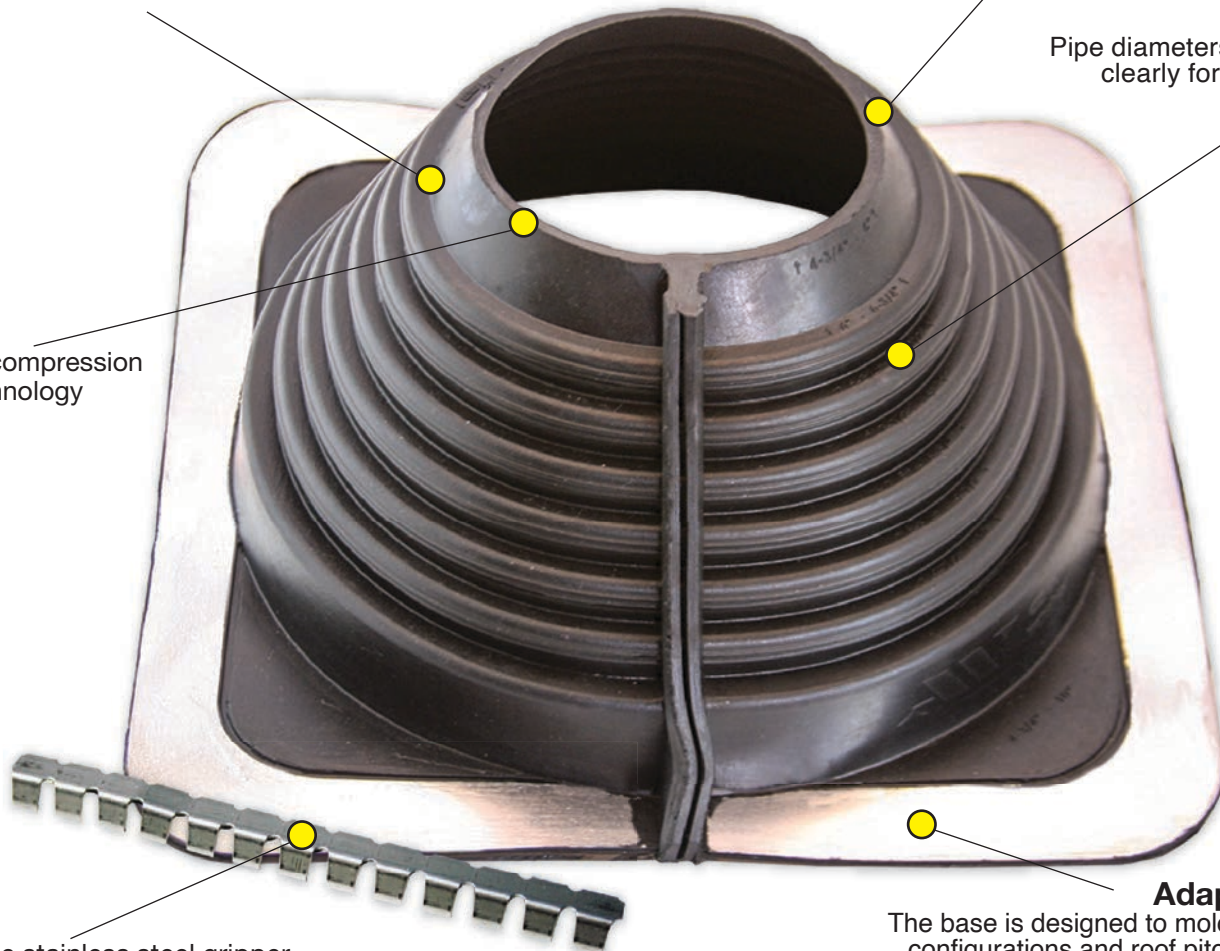


No hassle stainless steel gripper to secure retrofit applications


**Adaptable Base**  
The base is designed to mold to most panel configurations and roof pitches regardless of pipe location.

# Multi-Flash Master Flash®

## For the Metal Roofing Industry

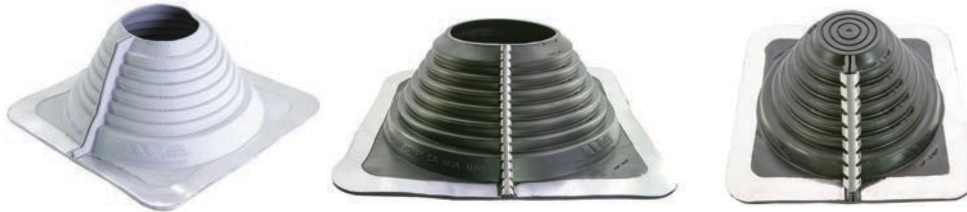


Name	Part #	Compound	Pipe Range	Base
#2	MF201BA-G	Black EPDM	Standard 7/8" - 4" (22 - 101mm)	6" (152mm)
	MF202GX-G	Gray Silicone	Retrofit 1-1/8" - 3-7/8" (28 - 98mm)	
#3	MF301BA-G	Black EPDM	Standard Closed - 5-3/4" (0-146mm)	8" (203mm)
	MF302GX-G	Gray Silicone	Retrofit 2" - 5" (50 - 127mm)	
#4	MF401BA-G	Black EPDM	Standard 2-3/4" - 7" (69 - 177mm)	10" (254mm)
	MF402GX-G	Gray Silicone	Retrofit 3" - 6-1/2" (76 - 165mm)	
#5	MF501BA-G	Black EPDM	Standard 4" - 8-1/4" (101 - 203mm)	11" (279mm)
	MF502GX-G	Gray Silicone	Retrofit 3-3/4" - 7" (95 - 177mm)	
#6	MF601BA-G	Black EPDM	Standard 4-3/4" - 10" (121 - 254mm)	12" (304mm)
	MF602GX-G	Gray Silicone	Retrofit 4-1/2" - 8-1/2" (114 - 215mm)	
#7	MF701BA-G	Black EPDM	Standard 6" - 11" (152 - 279mm)	14" (355mm)
	MF702GX-G	Gray Silicone	Retrofit 5-1/4" - 10" (133 - 254mm)	
#8	MF801BA-G	Black EPDM	Standard 6-3/4" - 12" (171 - 304mm)	17" (431mm)
	MF802GX-G	Gray Silicone	Retrofit 6-1/2" - 12-3/4" (165 - 323mm)	
#9	MF901BA-G	Black EPDM	Standard 9-1/2" - 20-1/2" (241 - 520mm)	25" (635mm)
	MF902GX-G	Gray Silicone	Retrofit 9-1/4" - 20-1/2" (234 - 520mm)	
Maxi	MF951BA-G	Black EPDM	Standard 12" - 28-1/2" (304 - 723mm)	34" (863mm)
	MF952GX-G	Gray Silicone	Retrofit 11" - 28" (279 - 711mm)	




### #2 Multi-Flash Flashing Details

A-Top Opening	7/8" (22mm)
B-Overall Height	2-3/4" (70mm)
C-Base	6" (152mm)




### #3 Multi-Flash Flashing Details

A-Top Opening	Closed
B-Overall Height	3" (76mm)
C-Base	8" (203mm)




### #7 Multi-Flash Flashing Details

A-Top Opening	6" (152mm)
B-Overall Height	5-1/2" (140mm)
C-Base	14" (355mm)




### #4 Multi-Flash Flashing Details

A-Top Opening	2-3/4" (69mm)
B-Overall Height	4-3/4" (120mm)
C-Base	10" (254mm)




### #8 Multi-Flash Flashing Details

A-Top Opening	6-3/4" (171mm)
B-Overall Height	5-3/4" (146mm)
C-Base	17" (431mm)




### #5 Multi-Flash Flashing Details

A-Top Opening	4" (101mm)
B-Overall Height	4-1/2" (114mm)
C-Base	11" (279mm)




### #9 Multi-Flash Flashing Details

A-Top Opening	9-1/2" (241mm)
B-Overall Height	5-3/4" (146mm)
C-Base	25" (635mm)



### #6 Multi-Flash Flashing Details

A-Top Opening	4-3/4" (120mm)
B-Overall Height	4-1/2" (114mm)
C-Base	12" (304mm)



### Maxi Multi-Flash Flashing Details

A-Top Opening	12" (304mm)
B-Overall Height	7-1/2" (190mm)
C-Base	34" (863mm)