

Multi-Flash Square Vent Master Flash®

Two applications three sizes
One Design • Multiple Functions

Advanced Ozone Resistance tested to...		EPDM 70 hour @ 500 pphm	HIGH TEMP RED SILICONE 70 hour @ 500 pphm
High Temperature Resistance Tested to	Intermittent	+135°C (+275°F)	+260°C (+500°F)
	Continuous	+100°C (+212°F)	+225°C (+437°F)
Low Temperature Resistance tested to...		- 55°C (-67°F)	- 74°C (-101°F)
Compression Set Maximum...		25%	50%

*Complete specification data and testing methods are available upon request.


Design for the Metal Roofing Industry
For both standard or retrofit applications

Weather Protection
Made of EPDM or High Temp Red Silicone,
 These flashings are compounded specifically for maximum resistance to weathering due to ozone and ultraviolet light.



Designed with a lip to secure plastic zip tie for retrofit applications


Sleeve flexibility absorbs vibration and pipe movement caused by expansion/contraction

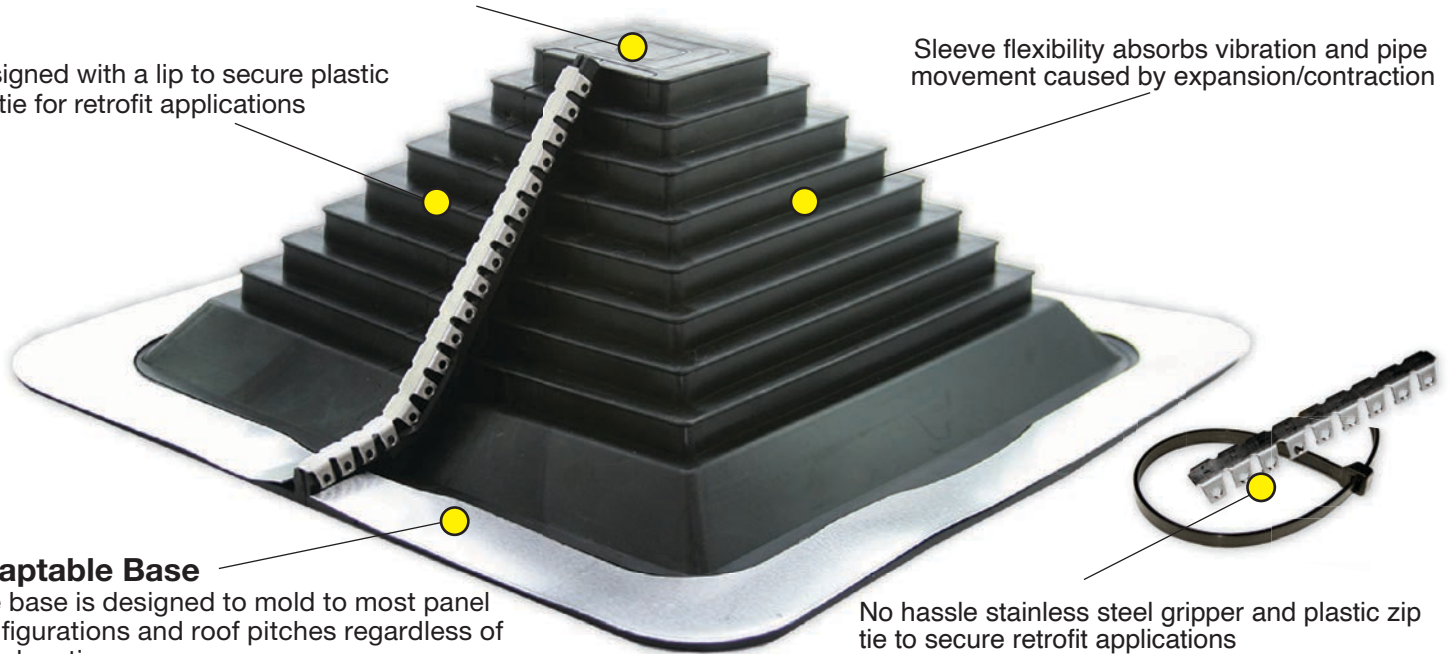

Adaptable Base
 The base is designed to mold to most panel configurations and roof pitches regardless of pipe location.

No hassle stainless steel gripper and plastic zip tie to secure retrofit applications

Multi-Flash Square Vent Closed Top

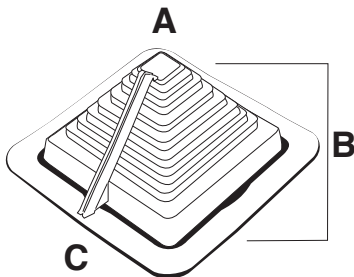

	COMPOUND	PART NO.	FLASHING DETAILS
#1	Black EPDM	MFSQ101BA	A-Top opening diameter - Closed
	Red Silicone	MFSQ102RA	B-Standard Closed- 5" (0 - 125mm)
			Retrofit 3/4" - 4-1/2" (20 - 115mm)
			C-Base dimensions - 8" (203mm)
#2	Black EPDM	MFSQ201BA	A-Top opening diameter - Closed
	Red Silicone	MFSQ202RA	B-Standard Closed- 10" (0 - 254mm)
			Retrofit 7/8" - 9-5/16" (22 - 237mm)
			C-Base dimensions - 14-1/4" (361mm)
#3	Black EPDM	MFSQ301BA	A-Top opening diameter - Closed
	Red Silicone	MFSQ302RA	B-Standard Closed- 19-1/8" (0 - 487mm)
			Retrofit Closed - 17-1/2" (0 - 444 mm)
			C-Base dimensions - 24-3/4" (628mm)