



Universal Retrofit Master Flash[®]

Designed for the **Metal Roofing Industry**

Advanced Ozone Resistance tested to...		EPDM 70 hour @ 500 pphm	HIGH TEMP RED/GRAY SILICONE 70 hour @ 500 pphm
High Temperature Resistance Tested to	Intermittent Continuous	+135°C (+275°F) +100°C (+212°F)	+260°C (+500°F) +225°C (+437°F)
Low Temperature Resistance tested to...		-55°C (-67°F)	-74°C (-101°F)
Compression Set Maximum...		25%	50%

*Complete specification data and testing methods are available upon request.

Designed for retrofit applications these flashings are designed to seal existing pipes/vents that requires a wrap-around existing or hard to reach installation

Available in Three sizes

Unique compression seal technology

Sleeve flexibility absorbs vibration and pipe movement caused by expansion/contraction


Easy on-site customization accommodates all normal installations.

No hassle stainless steel gripper to secure retrofit applications

Designed to seal existing pipes/vents that require a wrap-around existing or hard to reach installation




Weather Protection
Made of EPDM or High Temp Silicone, These flashings are compounded specifically for maximum resistance to weathering due to ozone and ultraviolet light.

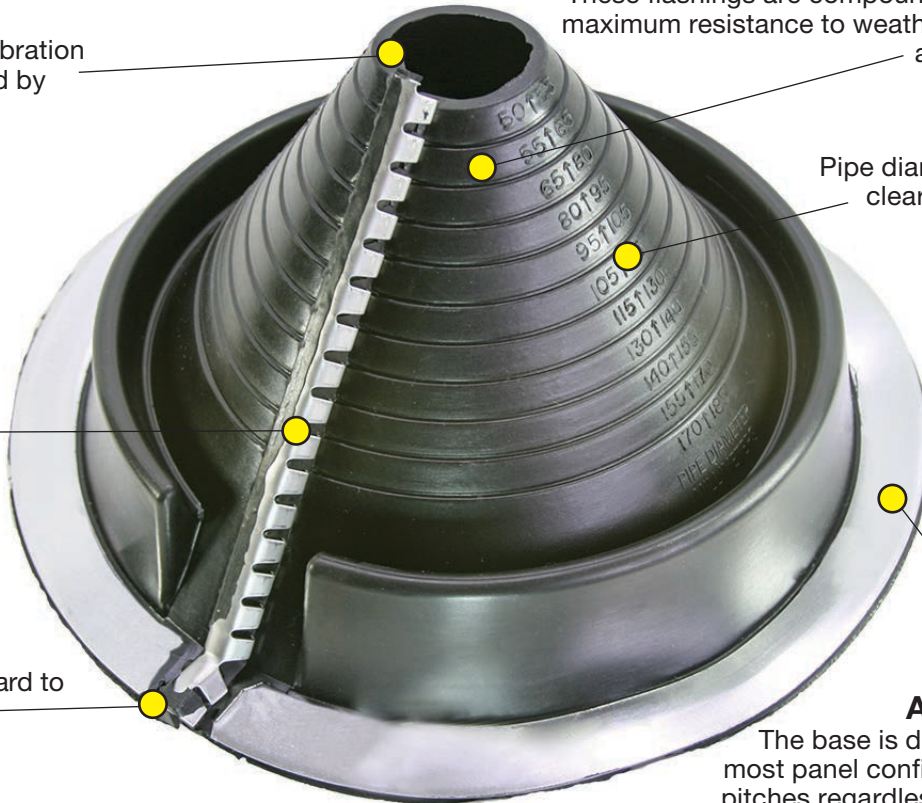

Pipe diameters can be seen clearly for proper fitting.

Adaptable Base


The base is designed to mold to most panel configurations and roof pitches regardless of pipe location.



#1 Universal Retrofit Flashing Details

A-Top Opening	7/8" (22mm)
B-Cut to suit pipe size	7/8" - 2-1/2" (22-63mm)
C-Base	6 - 1/4" (158mm)


* Part # RF101BS-RD (Black)



#2 Universal Retrofit Flashing Details

A-Top Opening	2" (50mm)
B-Cut to suit pipe size	2" - 6-1/2" (50-165mm)
C-Base	10-3/4" (273mm)

* Part # RF201BS-RD (Black)



#3 Universal Retrofit Flashing Details

A-Top Opening	3-1/4" (95mm)
B-Cut to suit pipe size	3-1/4" - 10" (95-254mm)
C-Base	14-1/2" (368mm)

* Part # RF301BS-RD (Black)