

Solar Multi-Port CT Master Flash[®]

5 Port Design for **Clay Tile Roofs**

No Fasteners Required! Just WeatherMaster™ Sealant

Advanced Ozone Resistance tested to...		EPDM 70 hour @ 500 pphm	HIGH TEMP RED/GRAY SILICONE 70 hour @ 500 pphm
High Temperature Resistance Tested to	Intermittent Continuous	+135°C (+275°F) +100°C (+212°F)	+260°C (+500°F) +225°C (+437°F)
Low Temperature Resistance tested to...		- 55°C (-67°F)	- 74°C (-101°F)
Compression Set Maximum...		25%	50%

*Complete specification data and testing methods are available upon request.

Easy install for Solar applications

Weather Protection

Made of EPDM or High Temp Red Silicone,


These flashings are compounded specifically for maximum resistance to weathering due to ozone and ultraviolet light.



UEL -5058



No Fasteners Required! Just WeatherMaster™ Sealant

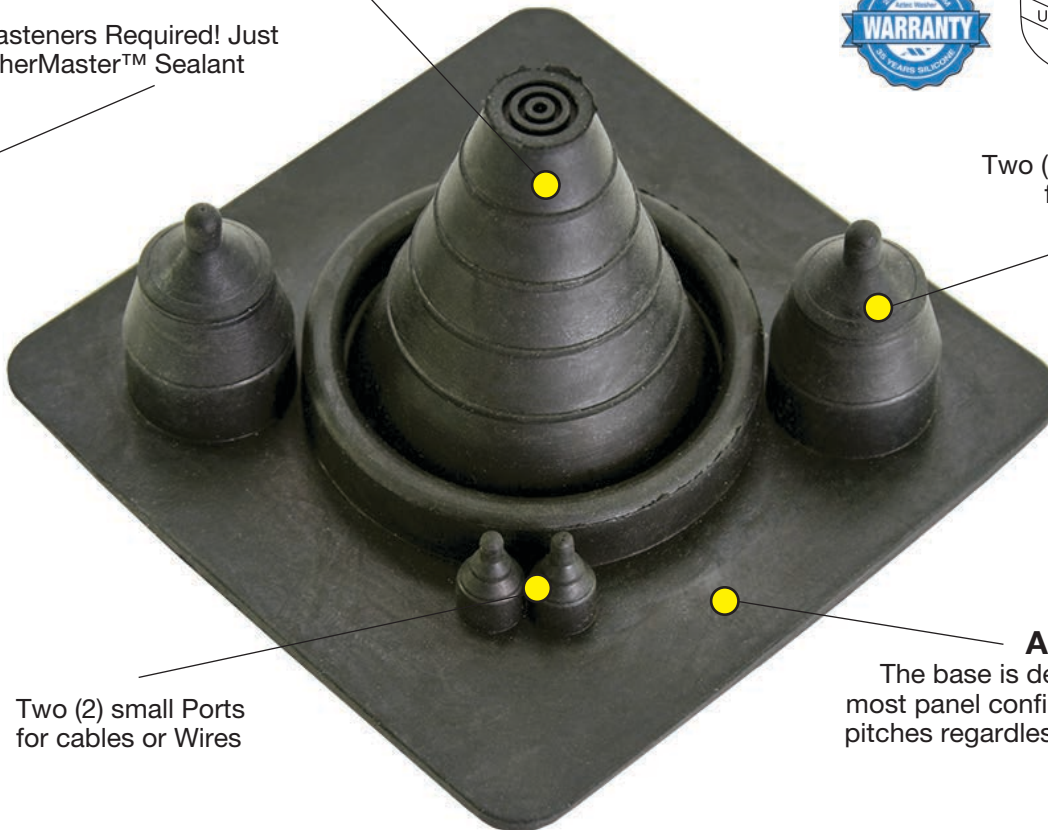


Two (2) large Ports Four for cables or Wires

Two (2) small Ports for cables or Wires

Adaptable Base
The base is designed to mold to most panel configurations and roof pitches regardless of pipe location.

Name	Part #	Compound	Pipe Range	Port	Port	Base
Multi Port-CT	SMP-CT101BA	Black EPDM	0" - 1-15/16" (0 - 49mm)	1/64"-3/8" (1-9mm)	3/16-15/16" (4-23mm)	4-1/2" (114mm)
	SMP-CT101TC	Terra Cotta EPDM				
	SMP-CT102RA	Red Silicone				



Solar Multi-Port-CT Flashing Details

A-Top Opening	Closed
B-Overall Height	2-1/2" (63mm)
C-Base	4-1/2" (114mm)