Solar Multi-Port-LD (Lead) Master Flash®

"Protective Coated safe Lead Base"
For the Residential Roofing Industry

Advanced Ozone Resistance tested to...	EPDM 70 hour @ 500 pphm	HIGH TEMP GRAY SILICONE 70 hour @ 500 pphm
High Temperature Resistance Tested to — Intermittent	+135°C (+275°F)	+260°C (+500°F)
High Temperature Resistance Tested to — Continuous	+100°C (+212°F)	+225°C (+437°F)
Low Temperature Resistance tested to...	– 55°C (-67°F)	– 74°C (-101°F)
Compression Set Maximum...	25%	50%

*Complete specification data and testing methods are available upon request.

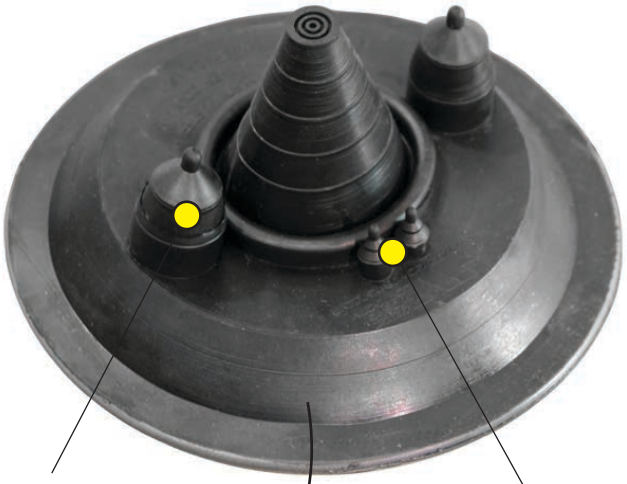

Four ports
for cables or wires per flashing to accommodate copper pipe and electrical cabling

Weather Protection
Made of EPDM or High Temp Gray Silicone,
These flashings are compounded specifically for maximum resistance to weathering due too zone and ultraviolet light.

large Port for cables or Wires

Two (2) small Ports for cables or Wires

Sleeve flexibility absorbs vibration and pipe movement caused by expansion/contraction

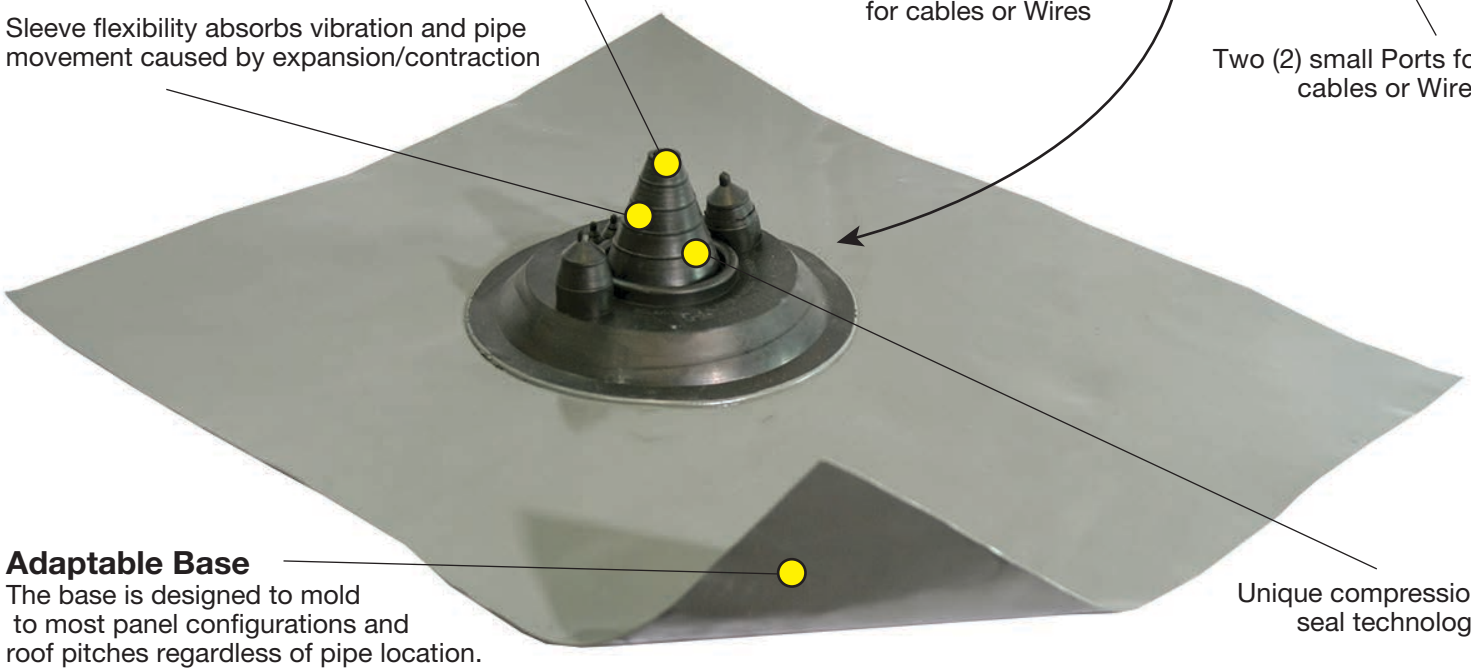

Adaptable Base
The base is designed to mold to most panel configurations and roof pitches regardless of pipe location.
Safe Lead Base: 16" x 19-1/4" (410 x 490mm)

Unique compression seal technology



Solar Multi-Port-LD (Lead) Flashing Details

A-Top Opening	0" - 1-15/16" (0 - 49mm)
B-Overall Height	2-1/2" (63mm)
C-Base	16" x 19-1/4" (410 x 490mm)

Name	Part #	Compound	Pipe Range	Port	Port	Base
Multi Port-LD	SMP-RL101BA	Black EPDM	Closed- 1-15/16" (0 - 49mm)	1/64"-3/8" (1-9mm)	3/16"-15/16" (4-23mm)	16"X19-1/4" (410x490mm)
	SMP-RL102RA	Red Silicone				

⚠ This product can expose you to certain chemicals, which are known to the State of California to cause cancer or birth defects to other reproductive harm.
For more information go to: www.P65Warnings.ca.gov