Solar Multi-Port-AL (Aluminum) Master Flash®

"Environmentally safe" lead free aluminum base.

For the Residential Roofing Industry

Advanced Ozone Resistance tested to...	EPDM 70 hour @ 500 pphm	HIGH TEMP RED/GRAY SILICONE 70 hour @ 500 pphm
High Temperature Resistance Tested to Intermittent / Continuous	+135°C (+275°F) / +100°C (+212°F)	+260°C (+500°F) / +225°C (+437°F)
Low Temperature Resistance tested to...	– 55°C (-67°F)	– 74°C (-101°F)
Compression Set Maximum...	25%	50%

*Complete specification data and testing methods are available upon request.

Sleeve flexibility absorbs vibration and pipe movement caused by expansion/contraction

Weather Protection
Made of EPDM or High Temp Red Silicone,

These flashings are compounded specifically for maximum resistance to weathering due too zone and ultraviolet light.

Four ports

for cables or wires per flashing to accommodate copper pipe and electrical cabling

Unique compression seal technology

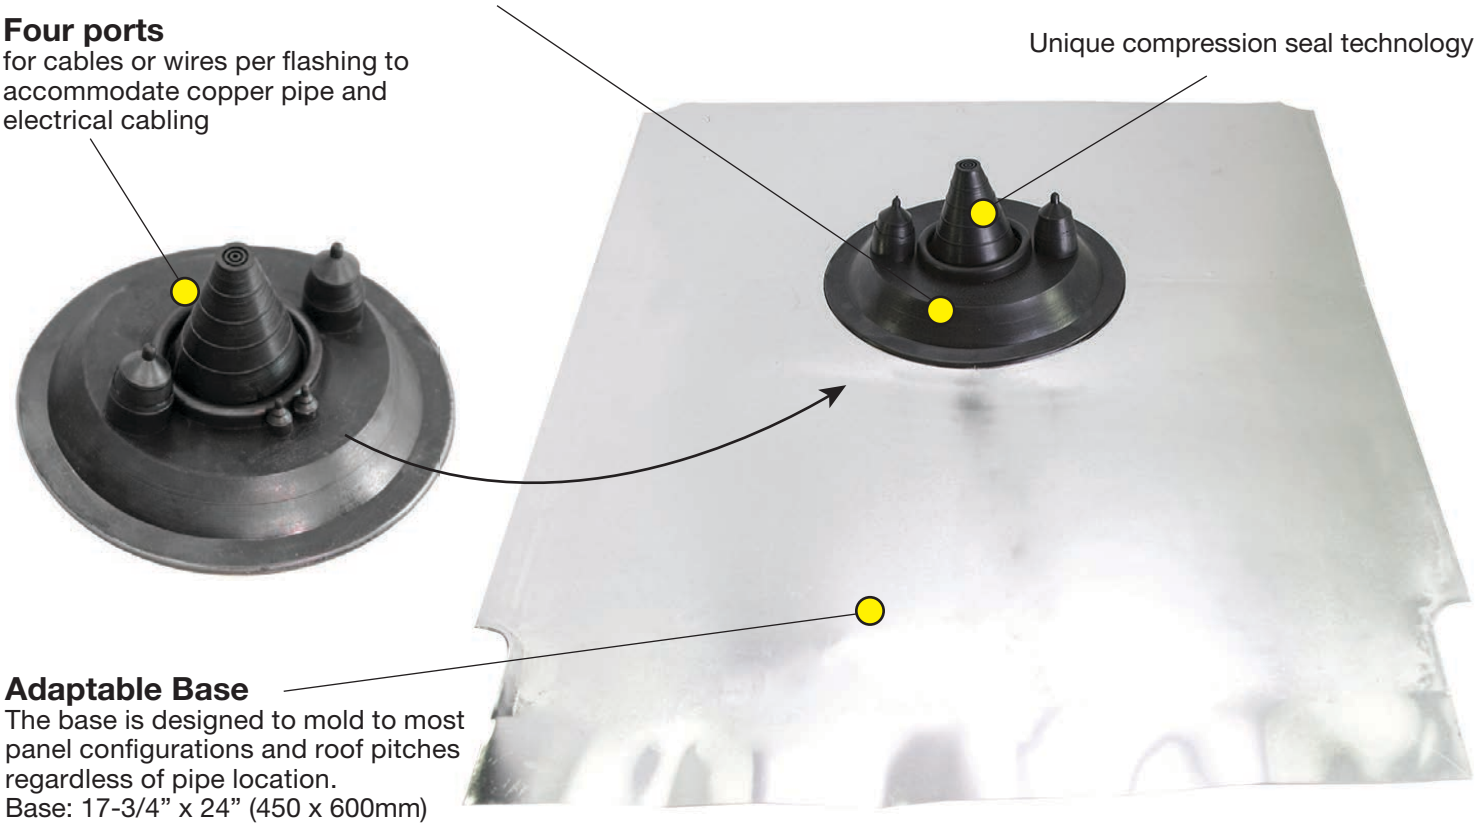

Adaptable Base

The base is designed to mold to most panel configurations and roof pitches regardless of pipe location.
Base: 17-3/4" x 24" (450 x 600mm)

Easy on-site customization accommodates all normal installations.



Solar Multi-Port-AL (Aluminum) Flashing Details

A-Top Opening	Closed - 1-15/16" (0 - 49mm)
B-Overall Height	2-1/2" (63mm)
C-Base	17-3/4" x 24" (450 x 600mm)

Name	Part #	Compound	Pipe Range	Port	Port	Base
Multi Port-AL	SMP-RS101BA	Black EPDM	Closed- 1-15/16" (0 - 49mm)	1/64"-3/8" (1-9mm)	3/16"-15/16" (4-23mm)	17-3/4"X24" (450x609mm)
	SMP-RS102RA	Red Silicone				

25 YEARS EPDM Aztec Washer WARRANTY 35 YEARS SILICONE

UPC ® UES ®

UEL -5058