Middy Master Flash®

2 Port Design for the Metal Roofing Industry

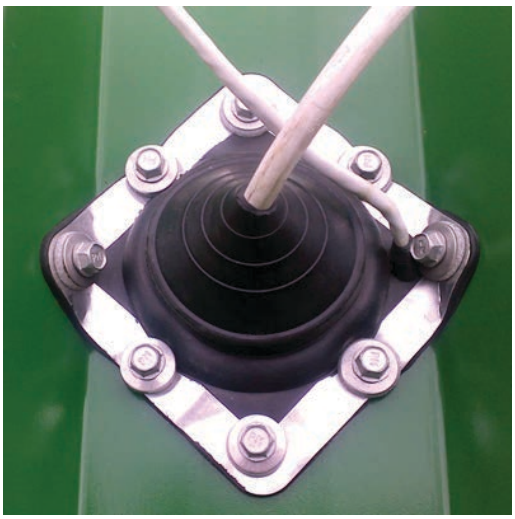

	EPDM 70 hour @ 500 pphm	HIGH TEMP RED SILICONE 70 hour @ 500 pphm
Advanced Ozone Resistance tested to...		
High Temperature Resistance Tested to Intermittent / Continuous	+135°C (+275°F) / +100°C (+212°F)	+260°C (+500°F) / +225°C (+437°F)
Low Temperature Resistance tested to...	– 55°C (-67°F)	– 74°C (-101°F)
Compression Set Maximum...	25%	50%

*Complete specification data and testing methods are available upon request.

One Design -
Handling Many Jobs Multiple Functions

Accommodates:
Center Pipe Range: Closed - 2-3/8" - (0 - 60mm) pipe / cable
Side Pipe / Cable Range: -1/64"- 3/8" (1-9mm) pipe / cable

Weather Protection
Made of EPDM or High Temp Red Silicone,
These flashings are compounded specifically for maximum resistance to weathering due too zone and ultraviolet light.

Sleeve flexibility absorbs vibration and pipe movement caused by expansion/contraction

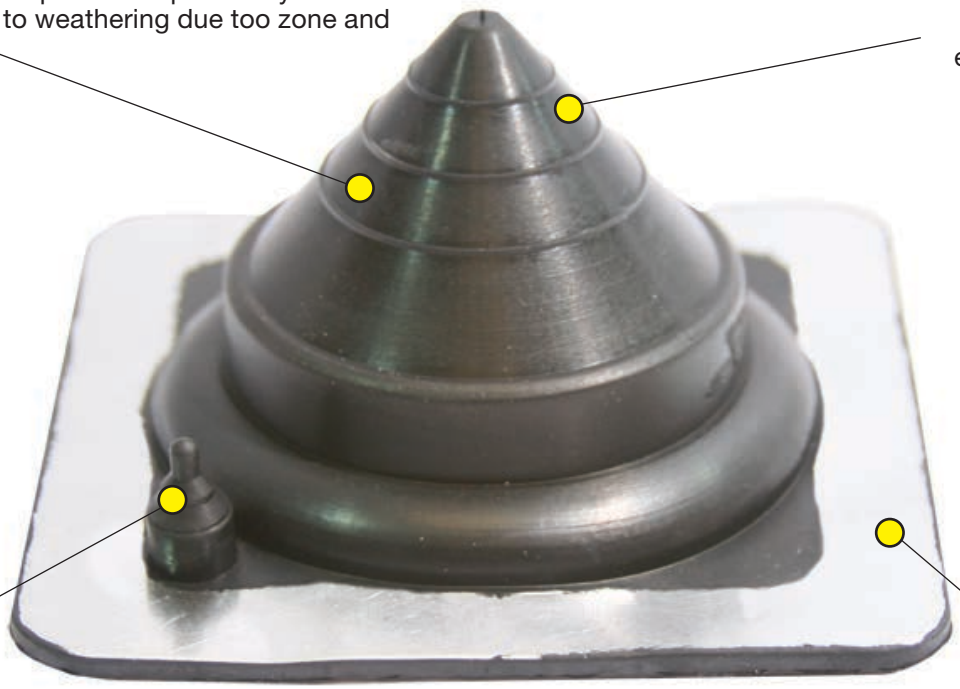

Single port for cables or wires to accommodate copper pipe and electrical cabling

Adaptable Base
The base is designed to mold to most panel configurations and roof pitches regardless of pipe location.



Middy Pipe Range: Closed - 2-3/8"

COMPOUND	PART NO.	FLASHING DETAILS
Black EPDM	SQ081BA	A-Top opening diameter - Closed
Gray EPDM	SQ081GA	B-Cut to suit pipe size - Closed - 2-3/8"
Red Silicone	SQ082RA	C-Base dimensions - 3-3/4"

WARRANTY

UPC ® UES ®
UEL -5058